

Circular Handrail Width 1½" Min. 2½" Max. Diameter or Provide Equivalent Grasability.




Noncircular Handrail Must Provide "Equivalent Grasping Surface" To The Specified Circular Cross Sections.

Minimum of 36" Guards Required On Raised Platforms (Landings) When Elevated More Than 30". Ladder Type Designs Are Not Acceptable.

Handrails are required on any flight of stairs having two or more risers.

Tread Width, Riser Height, and Nosing Projections May Not Vary More Than 3/8" In The Entire Run Of The Stair.

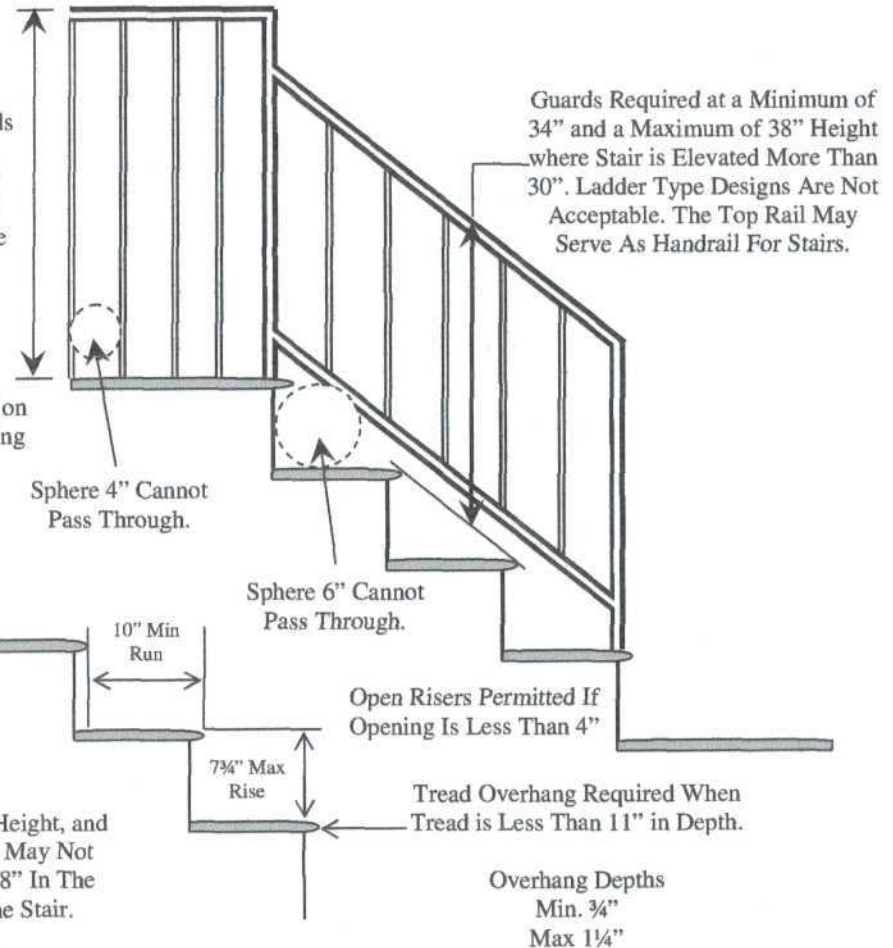

THE CITY OF BERLIN  
CODE ENFORCEMENT  
220 Main Street, Berlin, NH 03570  
603-752-1630, fax 603-752-8553

## Stairs Handout

Based On 2000 ICC IRC  
For Residential Use Only